


CAT 6A UTP SOLID CABLE

P/N:CLA04-UC6A

P/N: CLA04-UC6A

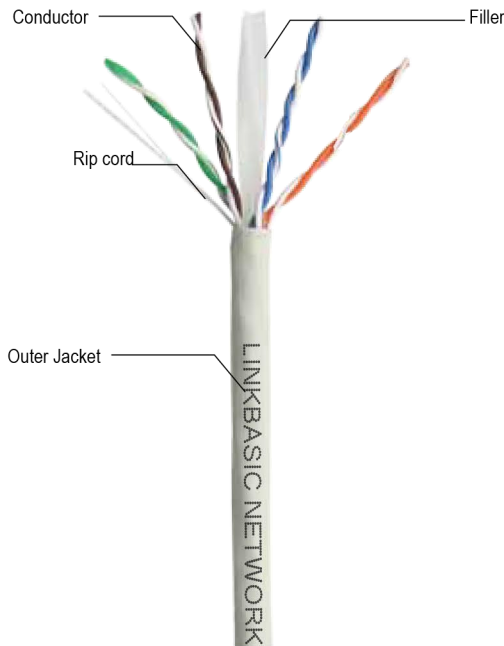

Product picture

DESCRIPTION

- Rated temperature:70°C
- Reference standard:UL Subject 444, EIA/TIA 568B, 2-1& ISO/IEC 11801, IEC 61163
- Solid bare copper conductor
- Colour-coded PE insulation
- Rip cord
- PVC or LSZH jacket
- Paclaging: Reel,Reel in Box

APPLICATION

- 100 Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T
- 1000Base-TX
- 155Mbps ATM
- 622Mbps ATM

MECHANICAL CHARACTERISTICS

Operating Temp. Range	-20~70°C
Max. Recommended Pulling Tension	110N
Min. Bend Radius (Install)	8 x O.D.
Flame Test	CMR